





SWITCH FUNCTION		( ) : MOMENTARY		
MODEL NO.				OPERATIONS
3018	OFF	—	ON	SPST
3019	ON	—	ON	SPDT
3020	OFF	—	(ON)	SPST
3053	ON	OFF	ON	SPDT
3053	(ON)	OFF	(ON)	SPDT
3053	ON	—	(ON)	SPDT
3053	ON	OFF	(ON)	SPDT

### SPECIFICATION:


- RATING : (3018) 10A 125VAC, 6A 250VAC (UL, CSA)  
6(4)A 250V~ T85 (VDE)  
(3053) 10A 125VAC, 6A 250VAC (UL, CSA)  
6(4)A 250V~ T85 (VDE)
- INSULATION RESISTANCE : DC 500V 100M $\Omega$  OR MORE
- CONTACT RESISTANCE : DC 2-4V 1A 20m $\Omega$  OR LESS
- WITHSTAND VOLTAGE : AC 1500V 1 Min.
- OPERATION FORCE : (3018) 400 $\pm$ 200gf  
(3053) 750 $\pm$ 200gf
- AMBIENT TEMPERATURE : -10°C TO 85°C
- ELECTRICAL LIFE : (3018) 25000 CYCLES  
(3053) 10000 CYCLES





MODEL NO. :3018  
3019  
3020

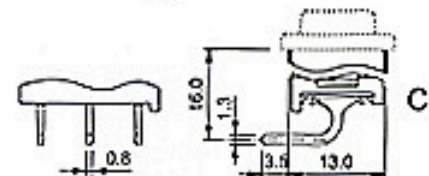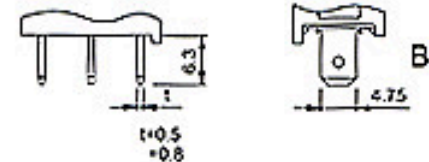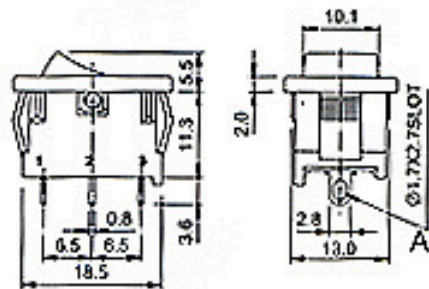


TERMINAL'S TYPE	
A	SOLDER TERMINAL
B	QUICK TERMINAL
C	PC TERMINAL (90°)



MODEL NO. :3053

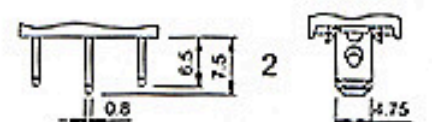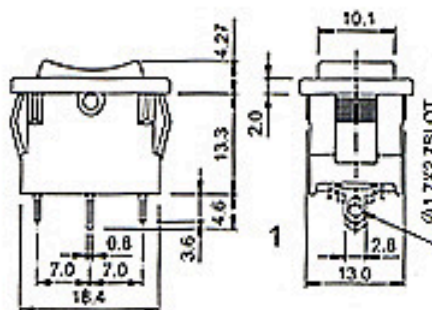

TERMINAL'S TYPE	
1	SOLDER TERMINAL
2	QUICK TERMINAL



W	PANEL THICK
19.2	0.75 ~ 1.25
19.4	1.25 ~ 2.00
19.6	2.00 ~ 3.00

**MOUNTING HOLE**  
(FOR REFERENCE)



3018



3019



3053

